




Model SU250  
SKU# 402446

Thermoplastic

# Utility Pumps



- Corrosion-resistant reinforced thermoplastic construction
- Bottom suction design filters debris and removes water down to 1/4 in.(0.64 cm)
- 1 in.(2.54 cm) minimum water level for the pump to prime and operate
- 3/4 in. NPT discharge with garden hose adaptor included
- Oil-filled motor for continuous lubrication

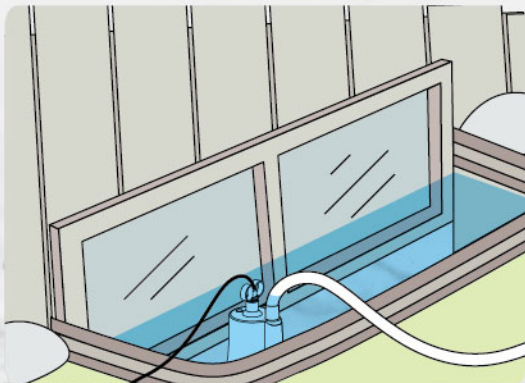

## PERFORMANCE

Model	HP	Discharge Head	0'	5'	10'	15'	20'	25'	Max. lift
SU250	1/3	Gallons/Hour	1800	1650	1500	1320	1080	800	31'