



Model SU250  
SKU# 402446  
USN# 334021016

Thermoplastic  
**1/3 HP Submersible  
Utility Pump**

- Corrosion resistant thermoplastic housing
- Removes water from basements, window wells, sinks and other flooded areas
- Easy, portable operation with 3/4" GHT connection and barbed adapter for use with 1-1/4" hose
- Bottom suction design filters debris and removes water down to 1/4"
- Energy-efficient, Oil cooled, PSC motor with thermal overload protection



**Performance**

Discharge Flow (GPH)								
Model No.	HP	0'	5'	10'	15'	20'	25'	Max. lift
SU250	1/3	1800	1650	1500	1320	1080	800	31'

## Application

Submersible utility pump for general water transfer


Voltage	115
Amps	3
Hertz	60
Phase	Single
RPM	3450RPM
Motor type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit requirements	10 AMP
Duty rating	Continuous*
Shaft seal	Lip seal
Motor Shaft	Stainless steel
Upper motor bearing	Ball bearing
Lower motor bearing	Ball bearing
Cooling	Oil cooled
Motor protection	Auto reset thermal overload protector

\*For continuous, the water depth must be at least 6" to prevent the motor from overheating

## Pump Specifications

Discharge size	3/4" garden hose thread & 1-1/4" hose with adapter included
Cord Length	10'
Cord type	SJTW 18AWG/3C, UL list
Pump Housing	Reinforced thermoplastic
Pump Base	Reinforced thermoplastic
Impeller material	Reinforced thermoplastic
Gasket	Rubber
Solids handling	1/8" spherical
Liquid temp. range	32°-95°F
Operation	Non-automatic
Fasteners	Stainless steel

## Performance

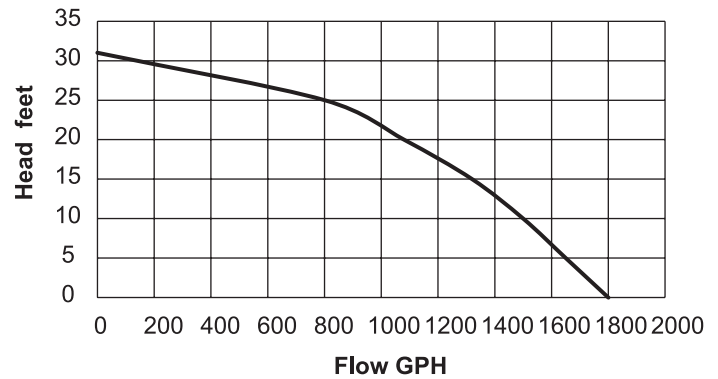

## Dimensions

